



TYLER SLONE 425.274.4281 slone@broderickgroup.com

ERIC MEUSSNER 425.274.4282 meussner@broderickgroup.com



RENDERING





TYLER SLONE425.274.4281
slone@broderickgroup.com

ERIC MEUSSNER425.274.4282
meussner@broderickgroup.com



PROPERTY HIGHLIGHTS



173,458 SF - NEW DEVELOPMENT LARGE FLOOR PLATES 1ST FLOOR: 85,167 SF 2ND FLOOR: 88,291 SF



1ST LEVEL FLOOR TO FLOOR: 24' 2ND LEVEL FLOOR TO FLOOR: 24'

(FLEXIBLE CEILING HEIGHTS BASED ON TENANT NEEDS, UP TO A MAX HEIGHT OF 51')



4 DOCK HIGH LOADING DOORS
1 GRADE LEVEL LOADING DOOR
PASSENGER & FREIGHT ELEVATOR



APPROX· 2.26/1000 PARKING ELECTRIC VEHICLE CHARGING STATIONS



ADJACENT TO LITTLE BEAR CREEK




5 MIN DRIVE FROM WOODINVILLE TOWN CENTER

The information contained herein has been given to us by the owner or sources which we deem reliable. We have no reason to doubt its accuracy, but we do not guarantee it. Prospective tenants should carefully verify all information contained herein.



SITE PLAN

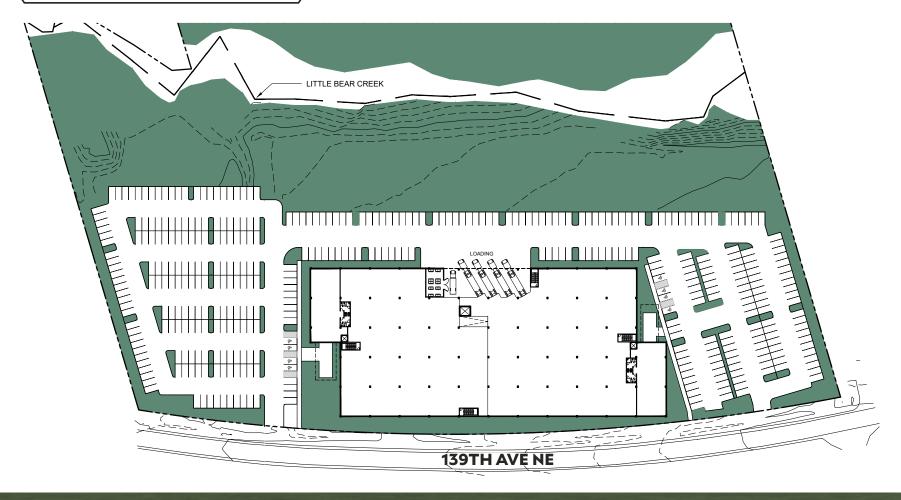




TYLER SLONE425.274.4281
slone@broderickgroup.com

ERIC MEUSSNER425.274.4282
meussner@broderickgroup.com



FLOOR PLAN

LEVEL ONE

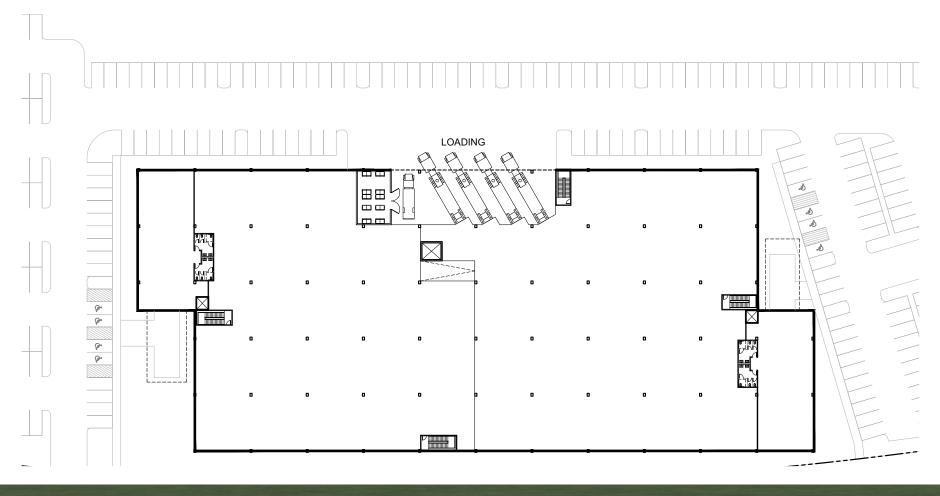






FLOOR PLAN

LEVEL TWO

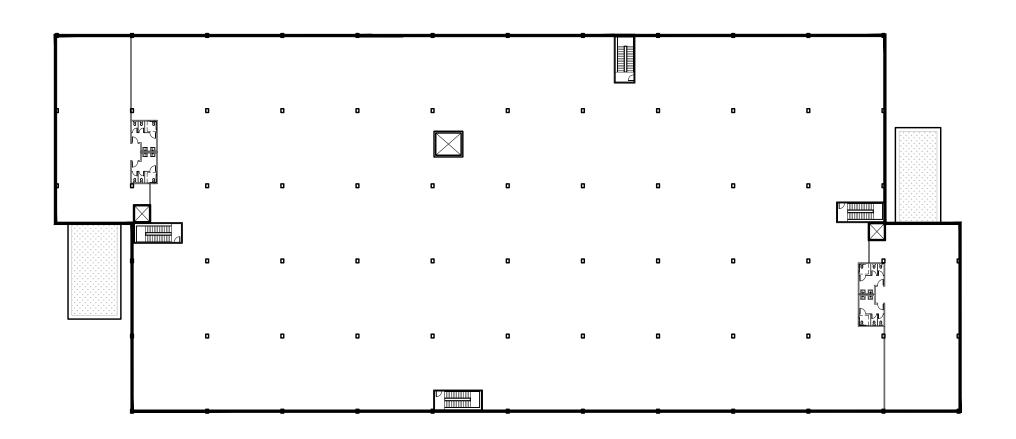









TYLER SLONE425.274.4281
slone@broderickgroup.com

ERIC MEUSSNER425.274.4282
meussner@broderickgroup.com



SPEC SHEET

Site and Square Footage Information

Facility is 168,000 SF (L1 = 84k, L2 = 84k)
The site is 14 acres total
392 Parking Stalls
Adjacent to Little Bear Creek
Access from two separate driveways off 139th Ave NE

Clear Heights

Level 1 = Range from 24'-6 to 28'-10" Level 2 = Range from 14'-3 to 28'-5"

Column Spacing

Variable. East-West columns spaced at 50'. North-South columns spaced anywhere from 24' to 49'.

Power/Electrical

4000amp 480v service (2k/floor) Prepped for Electric Vehicle chargers LED Lighting as part of initial build

Floor Load Ratings

L1 = 250psf(SOG), L2 = 125psf

Vertical Transportation

Two (2) 3,500lb passenger elevators One (1) 12,000lb freight elevator

Loading Docks

Five (5) loading bays at North of facility (4 dock high, 1 grade level).

Envelope Design

An assorted design of fiber cement paneling with translucent glazing and cedar cladding accents. Architectural board form outlines the foundation at grade level on the exterior. Composite Laminate Timber roof panels at the main entrance. Gable sloped roofs provide an open airy feel on Level 2.

HVAC

Fully conditioned space. Fan coil unit distribution throughout the building. Dedicated energy recovery units per floor.

Fire Systems

State of the art ESFR fire suppression system

The information contained herein has been given to us by the owner or sources which we deem reliable. We have no reason to doubt its accuracy, but we do not guarantee it. Prospective tenants should carefully verify all information contained herein.



